

11

SANI ONE

FEEL THE EXCITEMENT!

THE WORLD'S FIRST MODULAR HAND DRYER - OUR FAMOUS QUIET MODEL "SANI-ONE" WITH NEW DESIGN AND TECHNOLOGY- FEEL THE VIBE.

FEATURES



- Quietest hand dryer in the industry at 55 db. Now, 12 seconds drying time
- Automatic infrared actuated sensor, for power conservation and maximum hygiene
- Robust, tamperproof design and construction for greater product durability and longevity in application
- **Exclusive : Adjustable output airflow temperature**
- High improved velocity (8600 LFM) airflow for faster hand drying
- Universal voltage
- Modular design for easy repair
- Designed for easy installation
- **Dynamic With Screen**
 - Vandal proof
 - Tamperproof screws

APPLICATIONS

- Washrooms | Clean up Areas
- Commercial Facilities, Factories, Restaurants, Hospitals, Office buildings
- Residential





DIMENSIONS

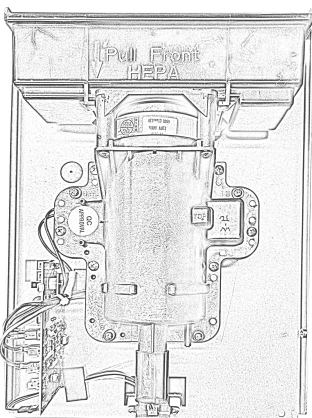

BACK VIEW

SIDE VIEW

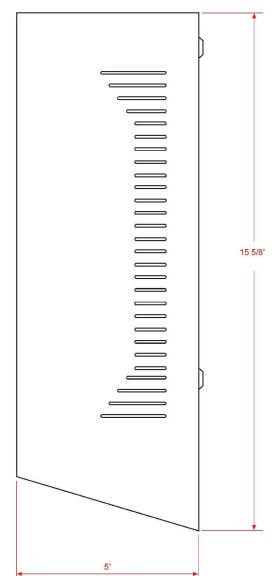
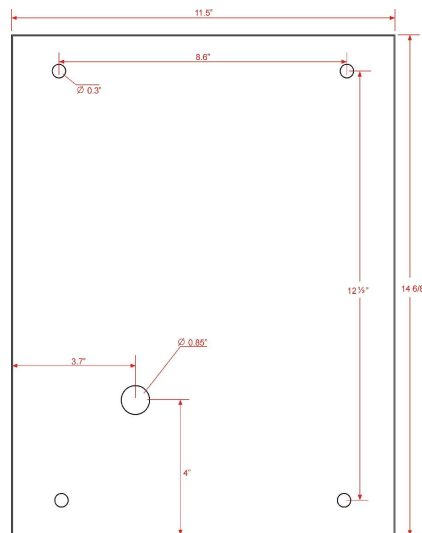




NEW & Improved

DO NOT DISTURB

LIFETIME WARRANTY



White

Black

Stainless Steel

Chrome

SPECIFICATIONS

Voltage Universal 115-230*VAC (*50/60Hz)
Wattage 1450 W at 5.7A (230VAC)
Motor 1800 RPM brushless external rotor
Colour White & Black antibacterial, Stainless steel
Finish Chrome, scratch-resistant porcelain, brushed stainless steel, micro paint
Heating Element 1380w resistance coil
Construction Material Reinforced Steel

Controls & Wiring Automatic resetting thermostat with cutout when airflow is restricted-Infrared sensor cutout two seconds after hand removal, and 60 seconds after initiating drying
Installation Removable predrilled baseplate for easy mounting
Warranty LIFETIME
 CSA certified for use in Canada and the U.S. CE approved for use where applicable.
Patent Pending

Video: <https://youtu.be/nq0q6pv5leg>
OXFORD ACADEMIC PAEDIATRICS & CHILD HEALTH CHOSSES "THE ONE"

ORDERING GUIDE

Model No. (LED OPTION L)	Color	Watts cold air Hot Air	Volts Hz	Air Velocity LFM	Air Volume CFM	Noise dB	Dimensions (W x H x D) (mm/in.)	Weight (kg/lbs.)
C-10000000 L-10000000	White	75-1450	115-230,50-60	8600	150	55	223 x 384 x 105 (8.77 x 15.11 x 4.13)	5.7/12.5
C-10000002 L-10000002	Black	75-1450	115-230, 50-60	8600	150	55	223 x 384 x 105 (8.77 x 15.11 x 4.13)	5.7/12.5
C-100220004 L-100220004	Brushed SS	75-1450	115-230, 50-60	8600	150	55	223 x 384 x 105 (8.77 x 15.11 x 4.13)	5.7/12.5
C-100220006 L-100220006	Chrome	75-1450	115-230, 50-60	8600	150	55	223 x 384 x 105 (8.77 x 15.11 x 4.13)	5.7/12.5